

Pump safety block

Type DBA; DBAW

RE 25880

Version: 2013-01

Replaces: 10.05



H5961+5962

- ▶ Sizes 32 and 40
- ▶ Component series 1X
- ▶ Maximum operating pressure 350 bar
- ▶ Maximum flow 650 l/min

Features

- ▶ Depressurized start-up and circulation of the pump
- ▶ To be mounted directly onto the SAE pressure port of the pump
- ▶ Quick pressure build-up
- ▶ 4 adjustment types for pressure adjustment, optionally
 - Rotary knob
 - Bushing with hexagon and protective cap
 - Lockable rotary knob with scale
 - Rotary knob with scale
- ▶ 5 pressure ratings, optional
- ▶ Solenoid-actuated unloading via a built-on directional valve
- ▶ Integrated check valve, optional
- ▶ Switching shock damping, optional (DBAW type only)

Contents

Features	1
Ordering code	2, 3
Symbols	4
Function, sections	5, 6
Technical data	7, 8
Characteristic curves	8, 9
Unit dimensions	10 ... 13
Possible pump types	13
Mating connectors	18
General notes	18
More information	18

Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC

Ordering code	14
Deviating technical data	15
Safety instructions	15 ... 17

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21
DBA								1X	/											*

01	Pump safety block	DBA
02	Without directional valve	no code
	With built-on directional valve	W
03	Without check valve	no code
	With check valve	R ¹⁾
04	Size 32	30
	Size 40	40
05	Normally closed	A ²⁾
	Normally open	B ²⁾
06	Connection / SAE flange ³⁾	
	Standard flange (200 ... 350 bar)	F
	High-pressure flange (350 bar)	H
07	Adjustment type for pressure adjustment	
	Rotary knob	1
	Bushing with hexagon and protective cap	2
	Lockable rotary knob with scale	3 ⁴⁾
	Rotary knob with scale	7
08	With main spool Ø24 mm	-
	With main spool Ø28 mm	N
09	Component series 10 ... 19 (10 ... 19: Unchanged installation and connection dimensions)	1X
10	Pressure rating	
	Set pressure ... 50 bar	50
	Set pressure ... 100 bar	100
	Set pressure ... 200 bar	200
	Set pressure ... 250 bar	250
	Set pressure ... 315 bar	315
	Set pressure ... 350 bar (only version "H")	350
11	Pilot flow	
	Pilot oil supply and pilot oil return internal (standard)	- ⁵⁾
	Pilot oil supply internal, pilot oil return external	Y
12	Standard version	no code
	Valve for minimum cracking pressure (not suitable for mutual relief!)	U

1) Only ... 315 bar

2) Ordering code only required if 02 = "W"

3) Please observe pressure ratings and connection dimensions.
(See page 12)4) H-key with material no. **R900008158** is included in the scope of delivery.

5) Hyphen "-" required only if 02 = "W" and 12 and 13 = "no code"

6) Mating connectors, separate order, see page 18

7) Ordering code only required if 02 = "W" and 13 = "S"


Preferred types and standard units are contained in the EPS (standard price list).

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	
DBA								1X	/												*

13	Without switching shock damping	no code
	With switching shock damping (version "W" only)	S
14	Without directional valve	no code
	With directional spool valve (data sheet 23178)	6E ²⁾
	With directional seat valve (data sheet 22058)	6SM ²⁾
15	Direct voltage 24 V	G24 ²⁾
	Direct voltage 205 V	G205 ²⁾
	Alternating voltage 230 V 50/60 Hz (version "6E" only)	W230 ²⁾
16	Without manual override	no code
	With manual override (version "6E" only)	N ²⁾
	With concealed manual override (standard)	N9 ²⁾
17	Electrical connection	
	Without mating connector with connector DIN EN 175301-803	K4 ^{2; 6)}
18	Nozzles – Ø1.2 mm in channel B of the directional spool valve	R12 ⁷⁾
	Nozzles – Ø1.2 mm in channel P of the directional seat valve	B12 ⁷⁾
19	Seal material	
	NBR seals	no code
	FKM seals	V
	(Other seals upon request) Attention! Observe compatibility of seals with hydraulic fluid used!	
20	Type examination	
	Without type examination	no code
	Type-examination tested safety valve according to PED 97/23/EC	E
21	Further details in the plain text	

Symbols

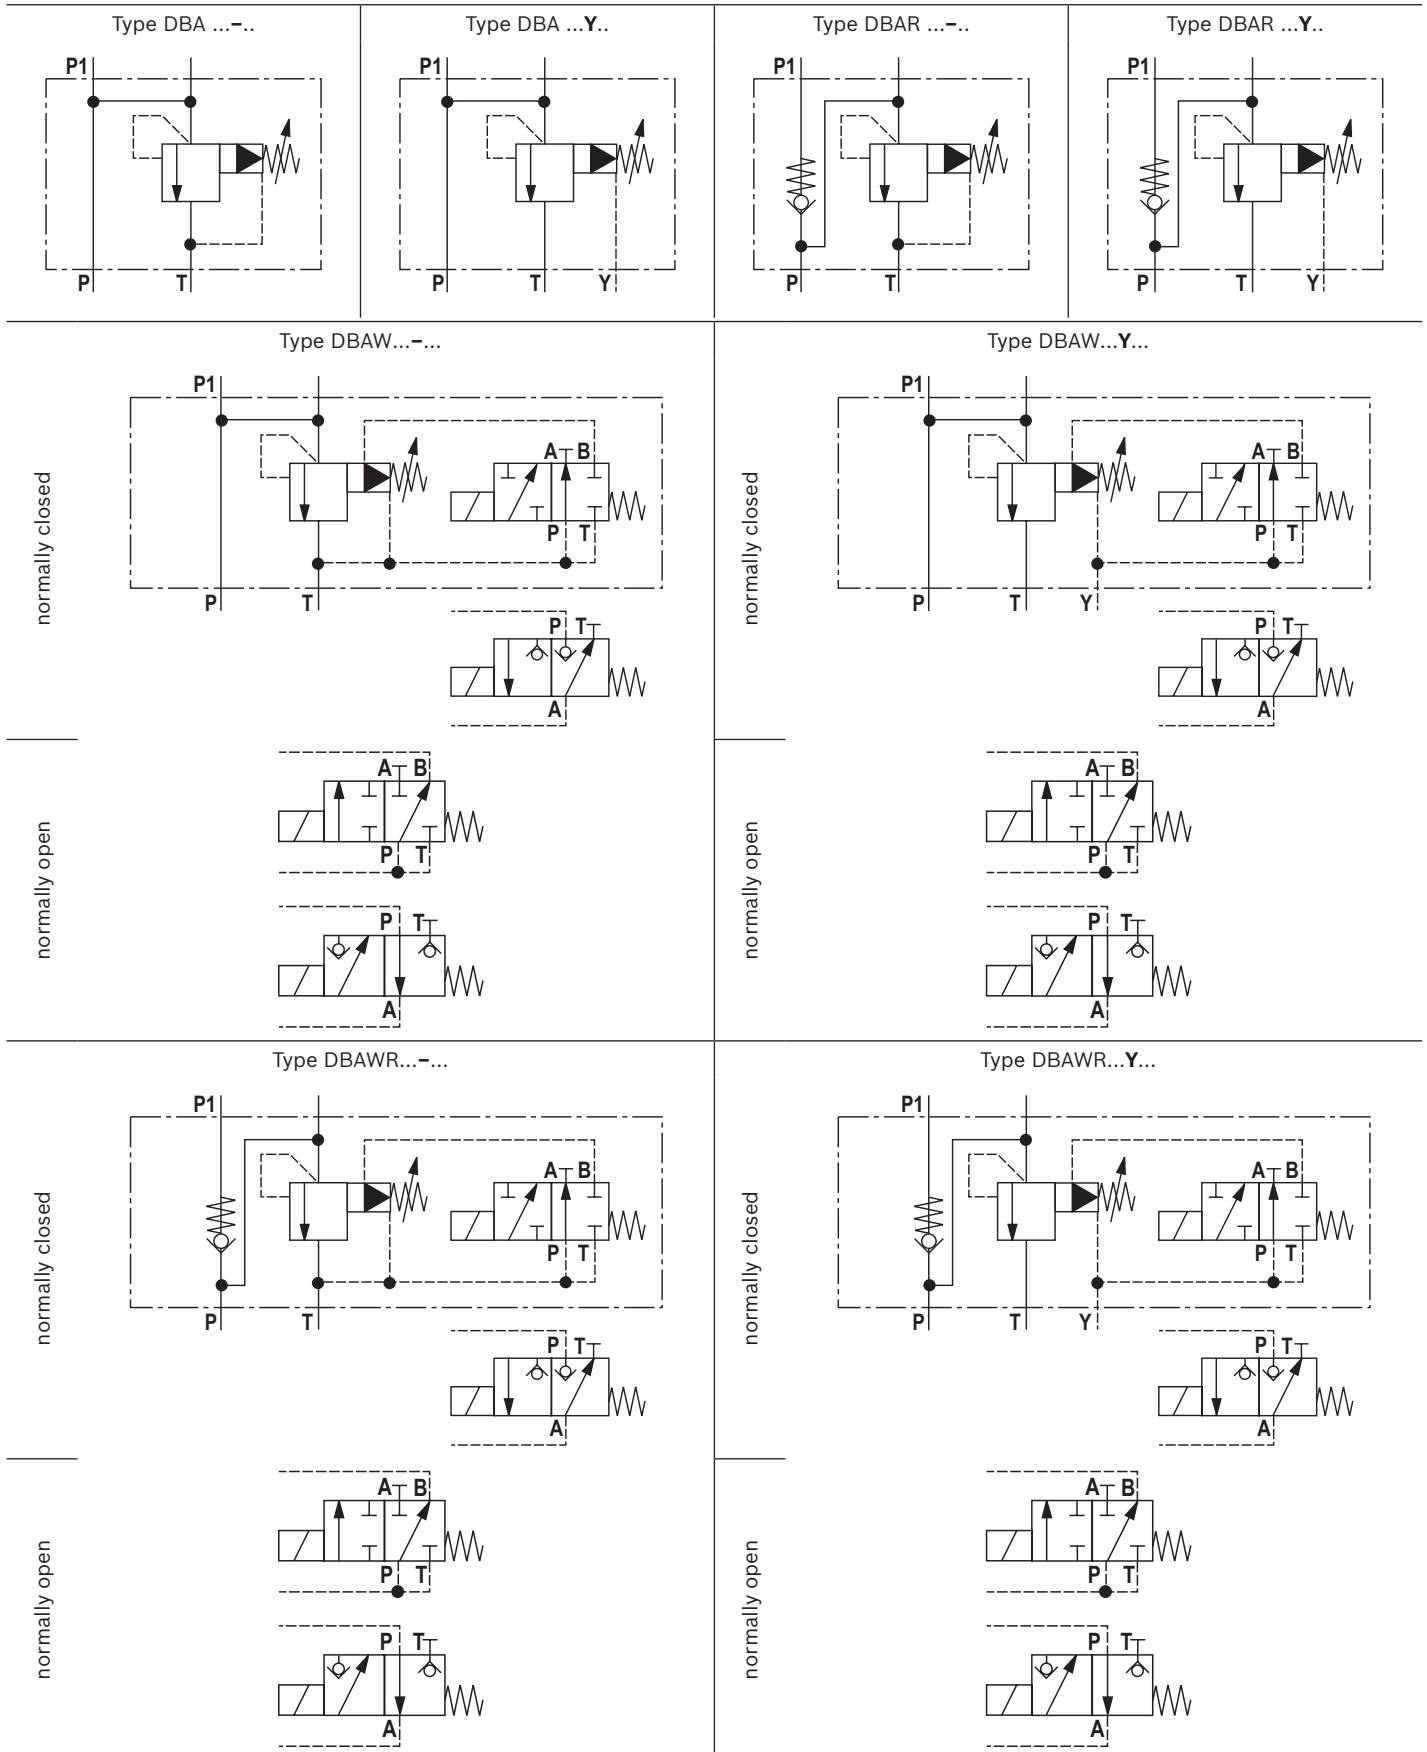

Function, sections

Pump safety blocks of types DBA/DBAW are pilot operated pressure relief valves which are integrated into a block and intended to be mounted directly onto the SAE pressure port of pumps.

They are used for limiting (DBA) or limiting and magnetically unloading (DBAW) the operating pressure.

Pump safety blocks (DBA) basically consist of a valve block (1), main spool insert (3) and pilot control valve (2) with adjustment type for pressure adjustment. The valve housing has a port P for the hydraulic fluid input and port P1 for the output. In a branch of the through-bore between these two ports there is the main spool insert. When this is open there is a connection to port T (tank line).

Pump safety block type DBA

The pressure applied in the through-bore acts on the main spool (3). At the same time, pressure is applied to the spring-loaded side of the main spool (3) and to the ball (8) in the pilot control valve (2) via the control lines (6) and (7) which are equipped with nozzles (4) and (5). If the pressure in the through-bore exceeds the value set at spring (9), ball (8) opens against spring (9).


The signal for this is provided internally from the through-bore via control lines (10) and (6). The hydraulic fluid on the spring-loaded side of main spool (3) now flows via the control line (7), nozzle bore (11) and ball (8) into the spring chamber (12). From here, it is fed into the tank, either internally for type DBA ...- via control line (13), or externally for type DBA ...Y via control line (14). Nozzles (4) and (5) cause a pressure drop to occur at the main spool (3), hence the connection from channel P to channel T opens. The hydraulic fluid now flows from channel P to channel T, whilst the set operating pressure is maintained.

Port (15) can be used for remote control purposes. If a pressure load cell or a pressure gauge isolator valve is to be connected here, then version SO616 – without nozzle (4) – must be ordered. This prevents delays in the build-up of pressure or brief pressure drops when the pressure gauge isolator valve is operated.

Pump safety block type DBAR (with check valve)

The integrated check valve maintains the system pressure when the pump is disconnected and prevents the hydraulic fluid from returning to the pump.


If this valve is selected, no separate check valve is needed.

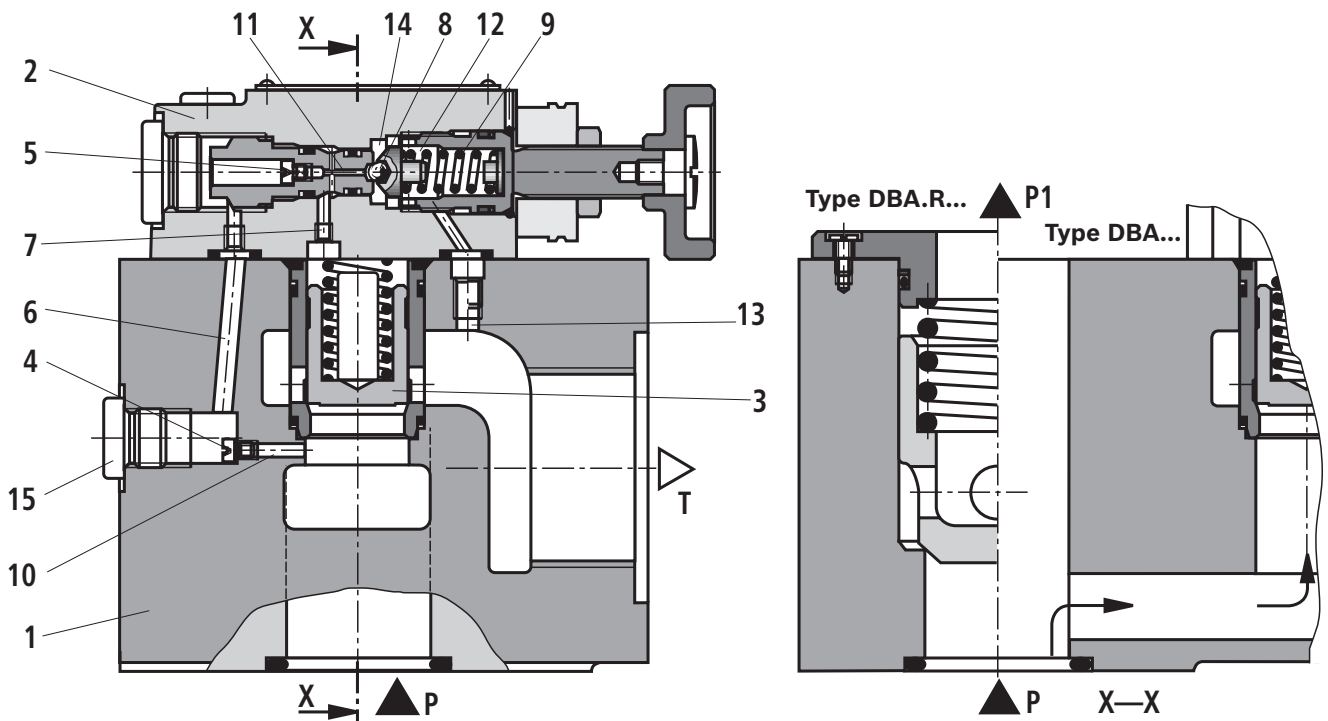

Function, sections, symbols

Pump safety block type DBAW...

In addition, it can be switched from the pressure limiting function to depressurized circulation by controlling the built-on directional valve (16). Thus, a depressurized start-up of the pump is possible.

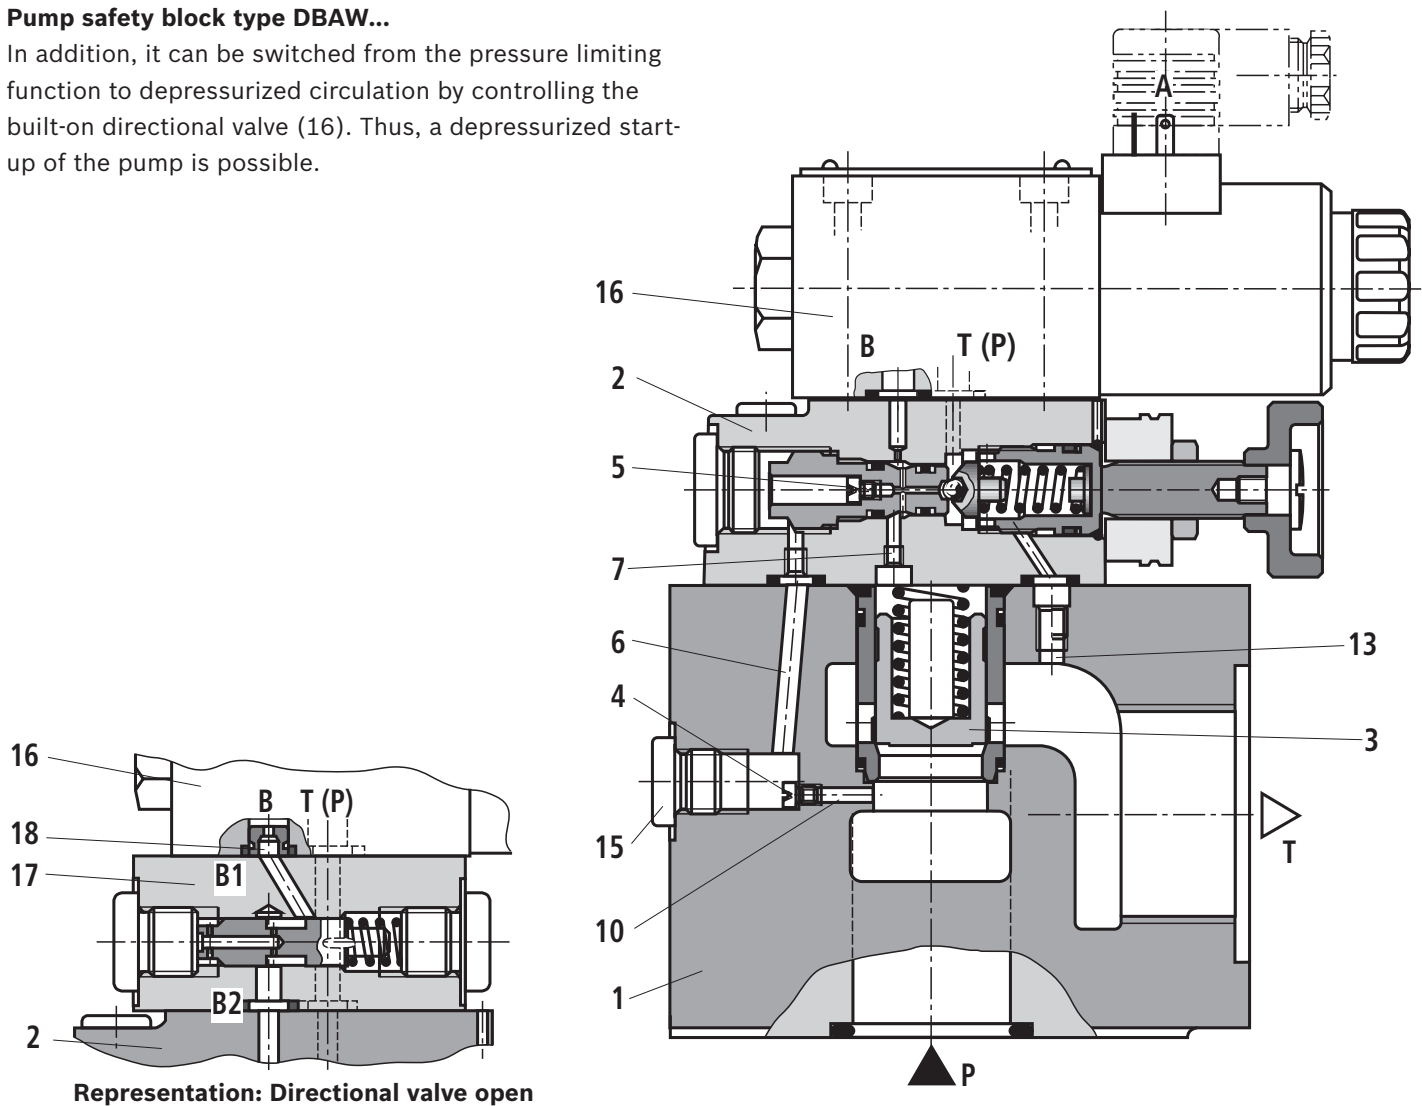


Representation: Directional valve open

Pump safety block with switching shock damping (sandwich plate), **type DBAW...S6E...R12** and **type DBAW...S6SM...B12**
 The opening of the connection from B2 to B1 or P2 to P1 is delayed by means of the switching shock damping valve (17). Pressure peaks and acoustic decompression shocks in the return line can thus be avoided. It is installed between the pilot control valve (2) and the directional


valve (16).

The degree of damping (decompression shock) is determined by the size of the nozzle (18). By default, a nozzle $\varnothing 1.2$ mm is installed (ordering code ..R12.. or ..B12..).

Type DBAW...S6E...R12

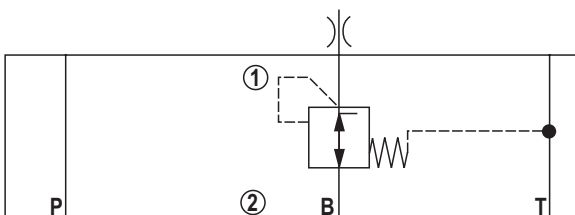

Type DBAW...S6SM...B12

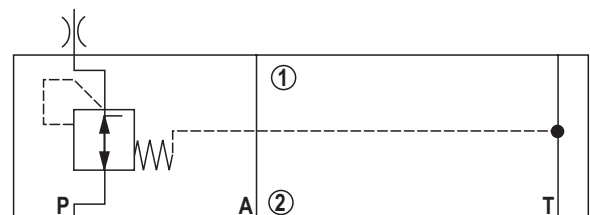

Technical data

(For applications outside these parameters, please consult us!)

general			
Size	Size	32	40
Weight	- Type DBA...	kg	8
	- Type DBAW...	kg	9.2
	- Check valve "R"	kg	+0.3
	- Switching shock damping "S"	kg	+0.6
Installation position	Any		
Ambient temperature range	- Type DBA...	-30 ... +80 (NBR seals) -15 ... +80 (FKM seals)	
	- Type DBAW...	-30 ... +50 (NBR seals) -15 ... +50 (FKM seals)	
Minimum stability of the housing materials		Housing materials are to be selected so that there is sufficient safety for all imaginable operating conditions (e.g. with regard to compressive strength, thread stripping strengths and tightening torques).	

hydraulic			
Maximum operating pressure	- Port P	bar	350
	- Port T	bar	315
Cracking pressure (for DBAR...)		bar	0.5
Maximum counter pressure	- Type DBA Port Y	bar	315
	- Type DBAW Port Y, T	bar	210 for DC solenoids or 160 for AC solenoid
Minimum set pressure		bar	Flow-dependent (see characteristic curves page 8 and 9)
Maximum set pressure		bar	50; 100; 200; 315; 350
Maximum flow	- Type DBA/DBAW	l/min	600
	- Type DBAR/DBAWR	l/min	350
Hydraulic fluid		See table page 8	
Hydraulic fluid temperature range		°C	-30 ... +80 (NBR seals) -15 ... +80 (FKM seals)
Viscosity range		mm ² /s	10 ... 800
Maximum permitted degree of contamination of the hydraulic fluid - cleanliness class according to ISO 4406 (c)		Class 20/18/15 ¹⁾	

¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the life cycle of the components. For the selection of the filters see www.boschrexroth.com/filter.

Technical data for directional seat valves see data sheet 22058, directional spool valves data sheet 23178. Deviating technical data for type-examination tested safety valves see page 15.

Technical data

(For applications outside these parameters, please consult us!)


Hydraulic fluid	Classification	Suitable sealing materials	Standards
Mineral oils and related hydrocarbons	HL, HLP, HLPD	NBR, FKM	DIN 51524
Bio-degradable	- insoluble in water	HETG	VDMA 24568
		HEES	
	- soluble in water	HEPG	VDMA 24568
Flame-resistant	- water-free	HFDU, HFDR	ISO 12922
	- containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	ISO 12922

- Important information on hydraulic fluids!**
- ▶ For more information and data on the use of other hydraulic fluids refer to data sheet 90220 or contact us!
 - ▶ There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.)!
- ▶ Flame-resistant – containing water:**
- Maximum operating pressure 210 bar
 - Maximum hydraulic fluid temperature 60 °C
 - Life cycle as compared to operation with mineral oil HLP 30 ... 100 %

Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ °C}$)

Minimum set pressure and circulation pressure dependent on the flow
Standard version

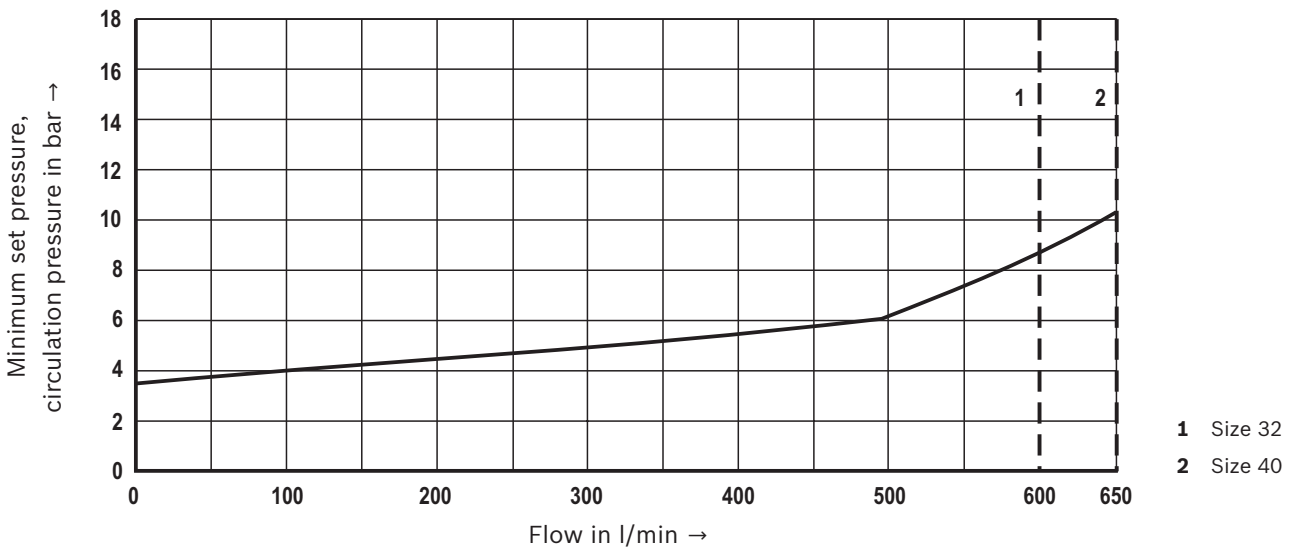


Notice!

- ▶ The characteristic curves were measured with **external, depressurized pilot oil return**.
With internal pilot oil return, the inlet pressure increases by the output pressure present in port T.
- ▶ The characteristic curves apply to the pressure at the valve output $p_T = 0 \text{ bar}$ across the entire flow range.

Characteristic curves


(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^\circ\text{C}$)

Minimum set pressure and circulation pressure dependent on the flow
Version "U"

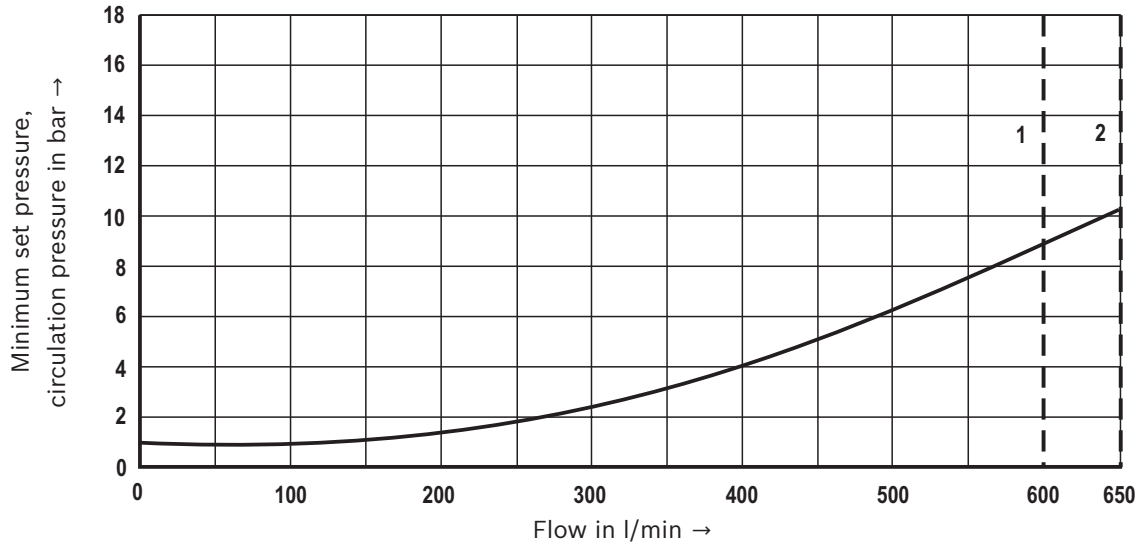

1 Size 32
2 Size 40

Inlet pressure dependent on the flow

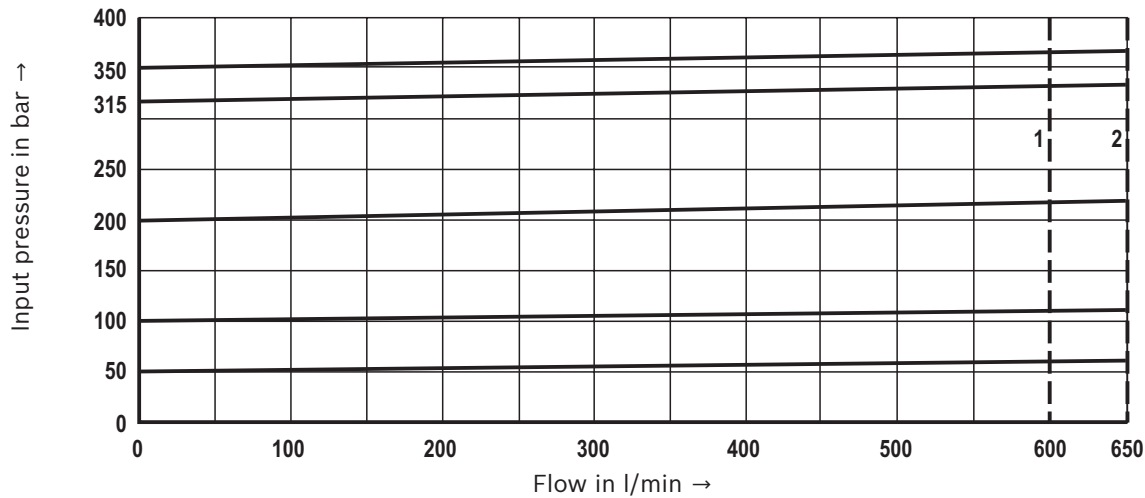


1 Size 32
2 Size 40

Notice!

- ▶ The characteristic curves were measured with **external, depressurized pilot oil return**.
With internal pilot oil return, the inlet pressure increases by the output pressure present in port T.
- ▶ The characteristic curves apply to the pressure at the valve output $p_T = 0$ bar across the entire flow range.

Unit dimensions: With directional spool valve
(dimensions in mm)

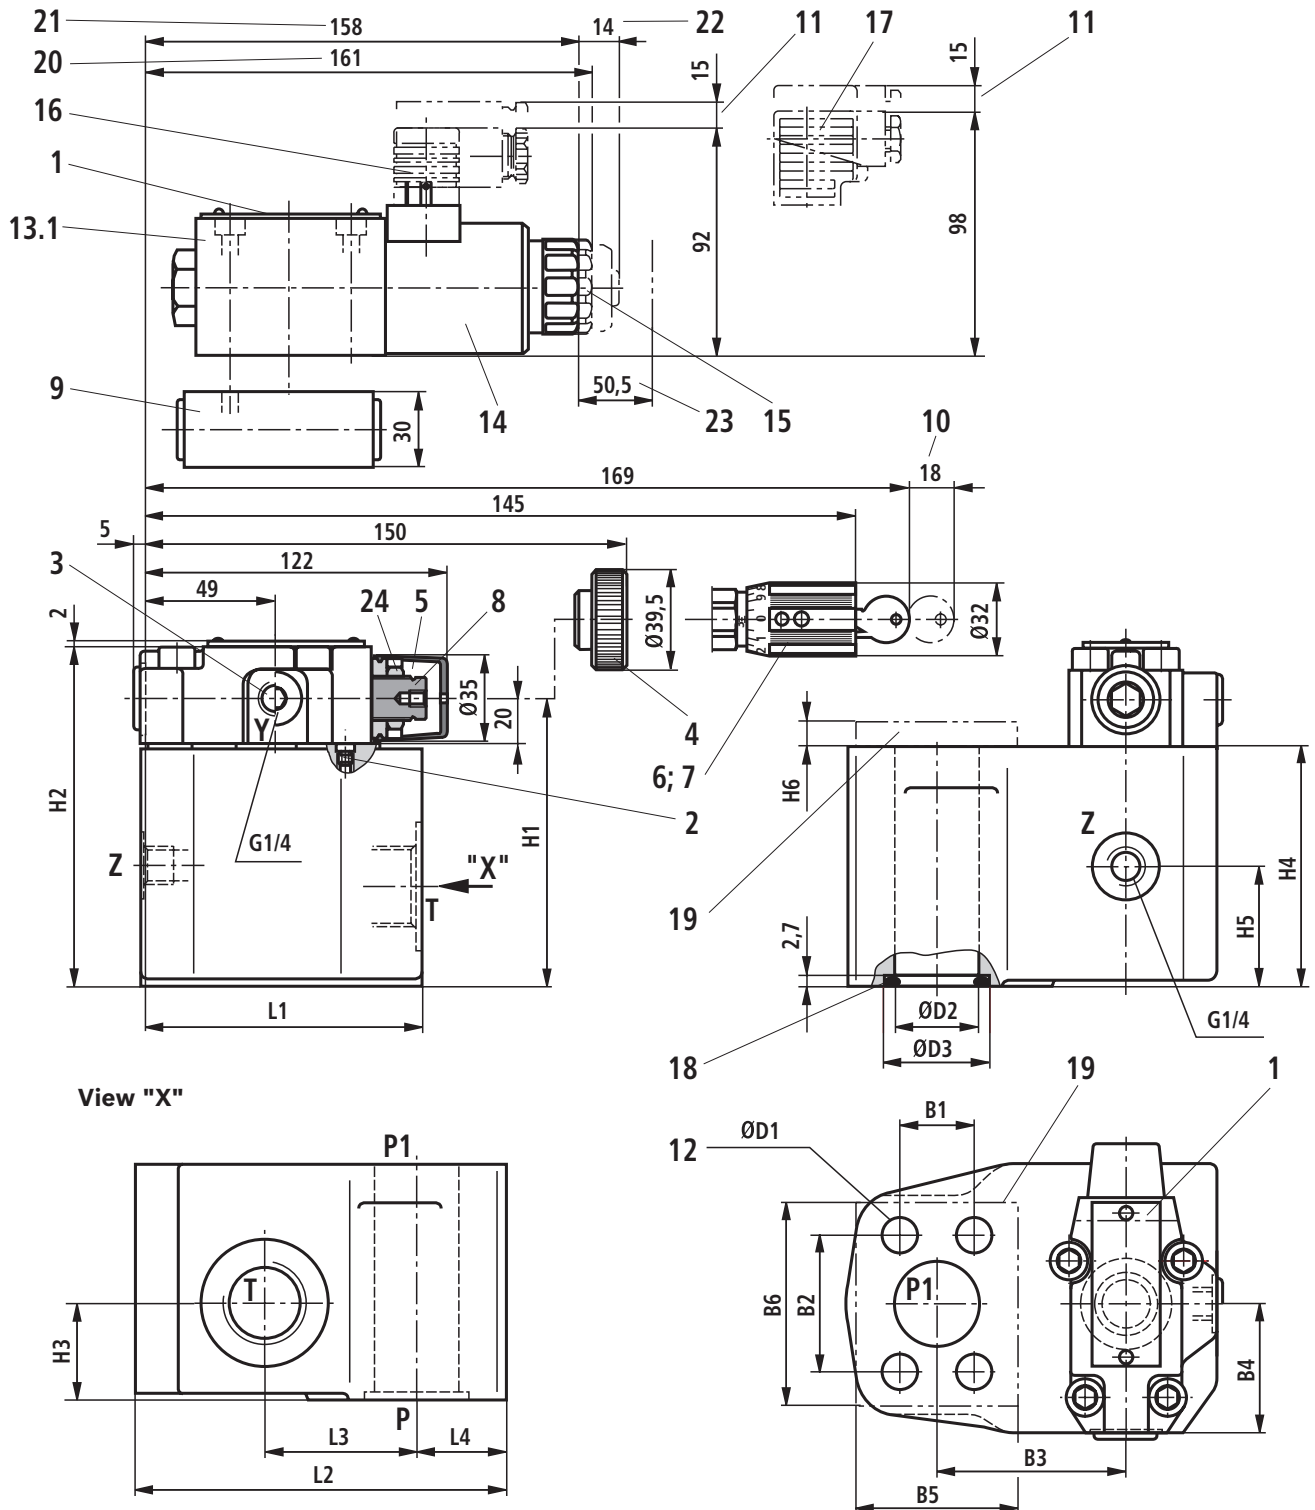

View "X"

Item explanations see page 13.
Dimensional tables see page 12.

0,01/100
Rz1max 4
Required surface quality of the valve contact surface

Unit dimensions

(dimensions in mm)

Standard flanges, version "DBA...F"

Size	L1	L2	L3	L4	B1	B2	B3	B4	B5 ¹⁾	B6 ¹⁾	H1	H2	H3	H4	H5	H6 ¹⁾	ØD1	ØD2	ØD3
32	121	138	55	38.5	30.2	58.7	65	48.3	60	80	105	125	43	85	43	9	11	32	45
40	138	156	54.5	49.5	35.8	69.9	74.5	54.7	60	100	118	138	50	98	56	8	13	40	54

Standard flanges, version "DBAR..F"

Size	L1	L2	L3	L4	B1	B2	B3	B4	B5 ¹⁾	B6 ¹⁾	H1	H2	H3	H4	H5	H6 ¹⁾	ØD1	ØD2	ØD3
32	121	138	55	38.5	30.2	58.7	65	48.3	60	80	105	125	43	85	43	9	11	25	40
40	138	156	54.5	49.5	35.8	69.9	74.5	54.7	60	100	118	138	50	98	56	8	13	30	54

Size	Version	Connections		4 valve mounting screws ISO 4762 - 10.9 ²⁾		Tightening torque M_A in Nm ³⁾
		P and P1	T		Material no.	
32	"DBA"	SAE 1 1/4"	G1 1/4	M10 x 120	R913000074	52
	"DBAR"			M10 x 125	R913000668	
40	"DBA"	SAE 1 1/2"	G1 1/2	M12 x 135	R913024229	77
	"DBAR"			M12 x 140	R913000312	

Admissible pressures (flange connections according to ISO 6162-1)
in bar

SAE 1 1/4"	250
SAE 1 1/2"	200

High-pressure flanges, version "DBA...H"

Size	L1	L2	L3	L4	B1	B2	B3	B4	B5 ¹⁾	B6 ¹⁾	H1	H2	H3	H4	H5	H6 ¹⁾	ØD1	ØD2	ØD3
32	121	138	55	38.5	31.8	66.7	65	48.3	60	90	105	125	43	85	43	8	15	32	45
40	138	156	54.5	49.5	36.6	79.4	74.5	54.7	65	110	118	138	50	98	56	8	17	40	54

High-pressure flanges, version "DBAR..H"

Size	L1	L2	L3	L4	B1	B2	B3	B4	B5 ¹⁾	B6 ¹⁾	H1	H2	H3	H4	H5	H6 ¹⁾	ØD1	ØD2	ØD3
32	121	138	55	38.5	31.8	66.7	65	48.3	60	90	105	125	43	85	43	8	15	32	40
40	138	156	54.5	49.5	36.6	79.4	74.5	54.7	65	110	118	138	50	98	56	8	17	30	54

Size	Version	Connections		4 valve mounting screws ISO 4762 - 10.9 ²⁾		Tightening torque M_A in Nm ³⁾
		P and P1	T		Material no.	
32	"DBA"	SAE 1 1/4"	G1 1/4	M14 x 135	R913024230	113
	"DBAR"			M14 x 145	R913024233	
40	"DBA"	SAE 1 1/2"	G1 1/2	M16 x 155	R913024234	184
	"DBAR"			M16 x 160	R913000354	

Admissible pressures (flange connections according to ISO 6162-1)
in bar

SAE 1 1/4"	350
SAE 1 1/2"	350

1) Only for version with check valve "R"

2) **Valve mounting screws** (separate order)**4 hexagon socket head cap screws ISO 4762 - 10.9-flZn-240h-L**
(for friction coefficient $\mu_{total} = 0.09 \dots 0.14$)**Attention!****For reasons of stability, other valve mounting screws must not be used!**3) The tightening torques are guidelines when using screws with the specified friction coefficients and when using a manual torque wrench (tolerance $\pm 10\%$).

Unit dimensions

- | | |
|---|---|
| <ul style="list-style-type: none"> 1 Name plate 2 Omitted with internal pilot oil return 3 Y port for pilot oil return, external 4 Adjustment type "1" 5 Adjustment type "2" 6 Adjustment type "3" 7 Adjustment type "7" 8 Hexagon wrench size 10 9 Switching shock damping sandwich plate, optional 10 Space required to remove the key 11 Space required to remove the mating connector 12 Valve mounting bore 13.1 Directional spool valve size 6 (data sheet 23178) 13.2 Directional seat valve size 6 (data sheet 22058) | <ul style="list-style-type: none"> 14 Solenoid "a" 15 Manual override, optional 16 Mating connector without circuitry, separate order, see page 18 17 Mating connector with circuitry, separate order, see page 18 18 Seal ring 19 Integrated check valve, version "R" 20 Dimension for valve without manual override 21 Dimension for valve with concealed manual override "N9" 22 Dimension for valve with manual override "N" 23 Space required to remove the coil 24 Lock nut, wrench size 17, tightening torque $M_A = 10^{+5}$ Nm |
|---|---|

Possible pumps (selection)

Pump	Type	Component series/series	Data sheet
Internal gear pump	PGH	3X	10227
	PGH	2X	10223
Displacement pump	A2FO	Series 6	91401
Industrial-type variable displacement pump	A4VSO	Series 3	92050
	A4VG	Series 3	92003
Variable displacement pump	A7VO	Series 63	92203
	A7VO	Series 63	92202
	A10VSO	Series 31	92711
	A10VSO	Series 32	92714

Notice!

Ensure that the connection dimensions are appropriate when selecting the pump, see page 10 ... 12!

Ordering code: Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC

Size	Type designation	Component marking	Maximum flow q_{Vmax} in l/min with pilot oil return		Set response overpressure p in bar
			External "Y"	Internal "-"	
32	DBA 30 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> E	TÜV.SV. <input type="text"/> -938.22.F.G.p	200	175	30 ... 60
	DBAR 30 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> E		400	260	61 ... 110
	DBAW 30 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> 6 * <input type="text"/> E		600	360	111 ... 210
	DBAWR 30 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> 6 * <input type="text"/> E		700	520	211 ... 350
40	DBA 40 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> E	TÜV.SV. <input type="text"/> -939.22.F.G.p	350	300	30 ... 60
	DBAR 40 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> E		450	350	61 ... 110
	DBAW 40 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> 6 * <input type="text"/> E		550	500	111 ... 210
	DBAWR 40 <input type="text"/> <input type="text"/> <input type="text"/> N1X/ <input type="text"/> <input type="text"/> <input type="text"/> 6 * <input type="text"/> E		700	600	211 ... 350

1	Directional valve, normally closed	A
	Directional valve, normally open	B
2	Standard flange	F
	High-pressure flange	H
3	Adjustment type	
	Hand wheel (pressure adjustment sealed, unloading or setting of a lower response pressure possible!)	1
	With sealed protective cap (no adjustment/unloading possible)	2
4	Pressure in the designation is to be entered by the customer, pressure adjustment ≥ 30 bar and possible in 5 bar steps.	e. g. 150
5	Pilot oil supply and return	
	Internal	- 1)
	Recommendation: Internal pilot oil supply, external pilot oil return (ordering code according to symbols page 4)	Y
*	Electrical data ordering code (see page 3)	e. g. EG24N9K4
6	NBR seals	no code
	FKM seals	V
	Value entered at factory	1X

1) Hyphen "-" required only if 02 = "W" and 12 and 13 = "no code" (see pages 2 and 3)

Deviating technical data: Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC ¹⁾

hydraulic			
Maximum counter pressures	– Port Y	bar	0
	– Port T	bar	10
Maximum flow	See table page 14 and characteristic curves page 16 and 17		
Hydraulic fluid	Mineral oil (HL, HLP) according to DIN 51524		
Hydraulic fluid temperature range			°C
			–20 ... +60 (NBR seals) –15 ... +60 (FKM seals)
Viscosity range	mm ² /s	12 ... 230	

¹⁾ For applications outside these parameters, please consult us!

Safety instructions: Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC

- ▶ Before ordering a type-examination tested safety valve, it must be ensured that at the desired **response pressure p** , the maximum admissible **flow $q_{V \max}$** (= numerical value at the position of letter "G" in the component marking) of the safety valve is higher than the maximum possible flow of the system/accumulator to be secured. In this, the corresponding regulations have to be observed!
- ▶ According to **PED 97/23/EC**, the increase in system pressure caused by the flow must not exceed 10 % of the set response pressure (see component marking). The maximum admissible flow $q_{V \max}$ specified in the component marking must not be exceeded. Discharge lines of safety valves must end in a risk-free manner. The accumulation of fluids in the discharge lines must **not** be possible (see AD2000 - data sheet A2).




It is imperative to observe the application notes!

- ▶ In the plant, the response pressure specified in the component marking is set with a flow of 2 l/min.
- ▶ The maximum admissible flow specified in the component marking applies to:
 - External pilot oil return "**Y**" without counter pressure in the pilot oil return line, admissible counter pressure in the discharge line (port T) < 15 bar.
 - Internal pilot oil return "**-**" without counter pressure in the discharge line (port T)
With internal pilot oil return, the system pressure increases by the counter pressure in the discharge line (port T) due to the increasing flow (observe AD2000 - data sheet; A2, item 6.3). To ensure that this increase in system pressure caused by the volume flow does not exceed the value of 10 % of the set response pressure, the admissible volume flow has to be reduced dependent on the counter pressure in the discharge line (port T), see characteristic curves pages 16 and 17).
- ▶ If a lead seal at the safety valve is removed, the approval according to the Pressure Equipment Directive becomes void.
- ▶ Basically, the requirements of the pressure equipment directives and of data sheet AD2000 A2 have to be observed!

Safety instructions: Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC

Maximum admissible flow $q_{V \max}$ dependent on the counter pressure p_T in the discharge line with internal pilot oil return

Type DBA 30 ...-1X/...E

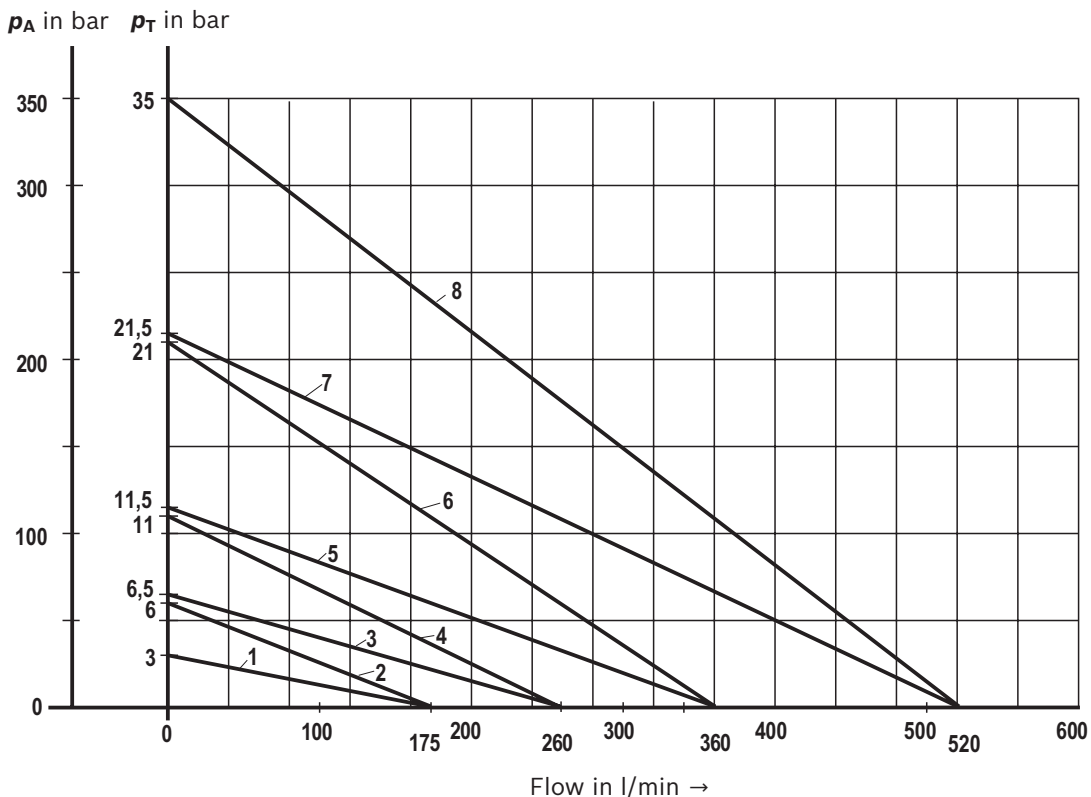


Characteristic curves	Response pressure p_A in bar
1	30
2	60
3	65
4	110
5	115
6	210
7	215
8	350

Characteristic curves for intermediate values can be generated by interpolation. Further explanations see page 17.

Safety instructions: Type-examination tested safety valves type DBA...E, component series 1X according to Pressure Equipment Directive 97/23/EC

Maximum admissible flow $q_{V \max}$ dependent on the counter pressure p_T in the discharge line with internal pilot oil return

Type DBA 40 ...-1X/...E

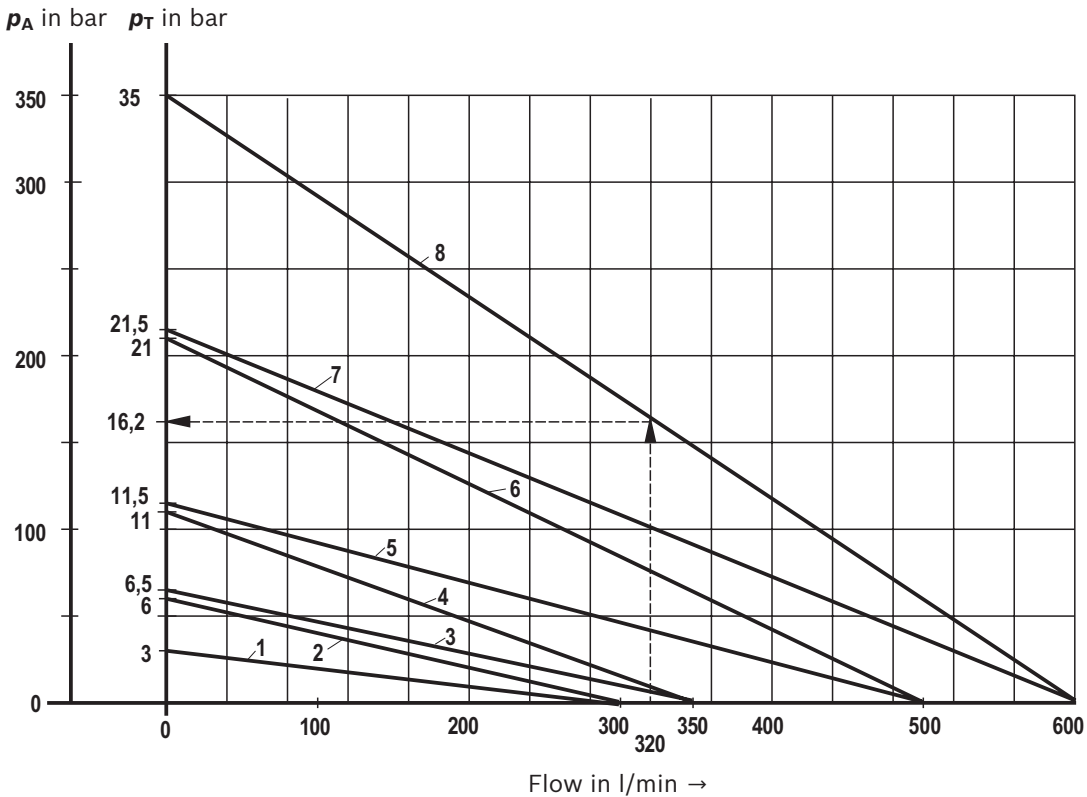

Charac- teristic curves	Response pressure p_A in bar
1	30
2	60
3	65
4	110
5	115
6	210
7	215
8	350

Characteristic curves for intermediate values can be generated by interpolation. Further explanations see below.

- p_A = Response pressure in bar
- p_T = Maximum admissible counter pressure in bar (sum of all possible tank pressures; see also AD2000 - data sheet A2)
- $q_{V \max}$ = Maximum admissible flow in l/min
- $p_{T \max}$ = 10 % x p_A (for $q_V = 0$) according to PED 97/23/EC

Explanation of the diagrams



(Example: Type DBA...E, above):

- known:
 - ▶ Flow of the system/accumulator that has to be secured $q_{V \max} = 320$ l/min
 - ▶ Set response pressure of the safety valve $p_A = 350$ bar

unknown: $p_{T \text{ admissible}}$

- Solution:** See arrows in diagram above
 $p_{T \text{ admissible}} (320 \text{ l/min; } 350 \text{ bar}) = 16.2 \text{ bar}$

Mating connectors according to DIN EN 175301-803

For details and more mating connectors see data sheet 08006				
	Material no.			
Color	Without circuitry	With indicator light 12 ... 240 V	With rectifier 12 ... 240 V	With indicator light and Zener diode suppression circuit 24 V
Gray	R901017010	-	-	-
Black	R901017011	R901017022	R901017025	R901017026

General notes:

- ▶ The unloading function (directional valve function with version "W") must not be used for safety functions!
- ▶ With version "B", the lowest adjustable pressure (circulation pressure) is set in case of power failure or cable break. With version "A", the pressure limiting function is set in case of power failure or cable break.
- ▶ Hydraulic counter pressures in port T with internal pilot oil return and/or port Y with external pilot oil return add 1:1 to the response pressure of the valve set at the pilot control.

Example:

Pressure adjustment of the valve by spring preload (item 9 on page 5) in the pilot control valve/adjustment type

$$p_{\text{spring}} = 200 \text{ bar}$$

Hydraulic counter pressure in port T with internal pilot oil return $p_{\text{hydraulic}} = 50 \text{ bar}$

$$\Rightarrow \text{Response pressure} = p_{\text{spring}} + p_{\text{hydraulic}} = 250 \text{ bar}$$

More information

- ▶ Directional spool valve
- ▶ Directional seat valve
- ▶ Hydraulic fluids on mineral oil basis
- ▶ General product information on hydraulic products
- ▶ Installation, commissioning and maintenance of industrial valves
- ▶ Selection of the filters

Data sheet 23178

Data sheet 22058

Data sheet 90220

Data sheet 07008

Data sheet 07300

www.boschrexroth.com/filter

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© Tous droits réservés par Bosch Rexroth AG, y compris en cas de dépôt d'une demande de droit de propriété industrielle. Tout pouvoir de disposition, tel que droit de reproduction et de transfert, détenu par Bosch Rexroth.

The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© Tous droits réservés par Bosch Rexroth AG, y compris en cas de dépôt d'une demande de droit de propriété industrielle. Tout pouvoir de disposition, tel que droit de reproduction et de transfert, détenu par Bosch Rexroth.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/18-0
documentation@boschrexroth.de
www.boschrexroth.de

© Tous droits réservés par Bosch Rexroth AG, y compris en cas de dépôt d'une demande de droit de propriété industrielle. Tout pouvoir de disposition, tel que droit de reproduction et de transfert, détenu par Bosch Rexroth.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.