Miniature Regulator ARJ1020F Series

- Compact and lightweight (16 g)
- Low cracking pressure 0.02 MPa Standard model equipped with backflow function



ARJ1020F-M5-04

ARJ1020F-M5-06



Symbol

Note) A standard model is equipped with a backflow function. A main valve opens when the inlet pressure is released, and then an outlet pressure backflows into the inlet side.

Standard Specifications

	Model	ARJ1020F		
Port	IN side	M5 (Male thread)		
size	OUT side (Applicable tubing O.D.)	ø4	ø6	
Fluid		A	ir	
Proof pre	essure	1.2	MPa	
Maximun	n operating pressure	0.8 MPa		
		Standard: 0.1 to 0.7 MPa		
Regulatin	ng pressure range	0.2 MPa setting 0.05 to 0.2 MPa		
Ambient	and fluid temperature	-5 to 60°C (No freezing)		
Construc	tion	Relieving type		
Weight (F	(g)	0.015	0.016	
Cracking	pressure (Valve)	0.02 MPa		
Max. effe	ctive area (OUT→IN)	1.8 mm ²		
Applicab	le tubing material Note)	Nylon, Soft nylon, Polyurethane		


Note) Be sure to note the maximum operating pressure for soft nylon and polyurethane. (Refer to Best Pneumatics No. 7.)

Accessory (Option)/Part No.

SMC


Description	Part no.	
Manifold base	ARJM10-4, -6, -10	

How to Order

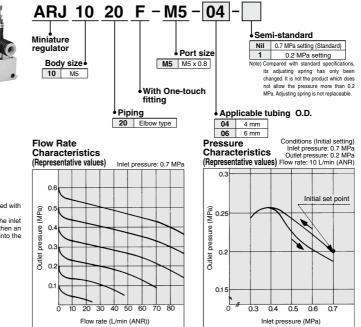

Miniature Regulator **ARJ1020F** Series

Construction/Dimensions





F

Component Parts

Dimensions

No.	Description	Material	Note
1	Body	PBT	
2	Valve guide	Brass	Electroless nickel plated
3	Piston	Polyacetal	
4	Bonnet	Brass	Electroless nickel plated
5	Knob	Brass	Electroless nickel plated
6	Adjusting spring	Steel wire	Zinc chromated
7	Valve	Brass	Rubber lining
10	Nipple	Brass	Electroless nickel plated

Replacement Parts

No.	Description	Material	Part no.	
7	Valve	Brass, HNBR	13434-30#1	
8	Gasket	Stainless steel NBR	P233014-04	
9	Spring	Stainless steel	134313	

Panel mounting hole

Max. 2.5t


 When replacing valves and springs, remove nipple first. Note that adhesive is applied to the nipple portion.


Dimensions										
Model	Α	В	С	D	E	F	G	н	J	К
ARJ1020F-M5-04	21	10.4	4	M5 x 0.8	6	10.6 (Width across	3.5	15.5	50	17.0
ARJ1020F-M5-06	22	12.8	6	0.0 X CIVI	0	flats: 10)	3.5	15.5	50	17.2


Manifold Base (Option)/Dimensions

66.5 32

hole)







Manifold base part no.	Stations	A dimension	B dimension	
ARJM10-4	4	90	82	
ARJM10-6	6	130	122	
ARJM10-10	10	210	202	

Precautions Precautions Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and pages 387 to 391 for Precautions on every series.

Piping

∆Warning

 To connect the IN side, hold the valve guide at its wrench flats (opposite side 10) and tighten it at the recommended torque of 1.0 to 1.5 N·m. (The recommended torque when using a tightening tool to tighten an additional 1/6 to 1/4 turn after tightening by hand) Excessive torque or holding it at an

area other than the specified portion may result in a malfunction.

 While piping to products or operating the knob, ensure that an excess bending moment should not be applied to a product, because it may result in damage.

Mounting/Adjustment

∆Warning

 Set up the regulator while verifying the pressure that is indicated on the inlet and the outlet pressure gauges. Turning the knob excessively could damage the internal parts.

∆Caution

 Release the lock to adjust the pressure. After the adjustment, engage the lock. Failure to observe this procedure could damage the knob or cause the outlet pressure to fluctuate.
<Lock operating method>

Loosen the lock nut to unlock it, and tighten it to lock it.

 This product can be used as a check regulator by installing it between solenoid valve and actuator.

ARJ
AR425 to 935
ARX
AMR
ARM
ARP
IR□-A
IR
IRV
VEX
SRH
SRP
SRF
ITV
IC
ITVH
ITVX
PVQ
VY1
VBA Vbat
AP100

Miniature Regulator ARJ210 Series

- Lightweight body made of aluminum (60 g)
- Two types of piping connections provided for the IN side: 1/8 (male thread) and M5 (female thread)



AB.1210-M5

ARJ210-M5BG

Symbol




Standard Specifications

Model		ARJ210-M5		
Port size IN side		1/8 (Male thread), M5 x 0.8 (Female thread)		
Port size	OUT side	M5 x 0.8 (Female thread 2 pcs.)		
Fluid		Air		
Proof pressure		1.2 MPa		
Maximum operating pressure		0.8 MPa		
Regulating pressure range		Standard: 0.2 to 0.7 MPa		
		0.2 MPa setting 0.05 to 0.2 MPa		
Pressure gauge port s	ize	M5 x 0.8 (Female thread)		
Ambient and fluid temperature		-5 to 60°C (No freezing)		
Construction		Relieving type		
Weight (kg)		0.06		

Accessory (Option)/Part No.

Bracket	134856		
Pressure gauge Note)	G27-10-R1		
Note) When ordering the pressure gauge, a socket assembly (134828A) is required.			

When installing a pressure gauge, the socket assembly must be fixed and installed to prevent the thread from breaking. 0.2 MPa specification is not available for G27.

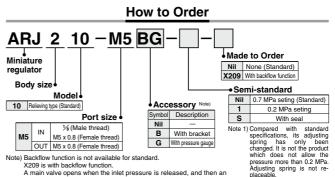


A main valve opens when the inlet pressure is released, and then an outlet pressure backflows into the inlet side.


X209 is a product with pressure gauge (G27-10-M-X202). The symbol "G" for accessory is not necessary.


Flow Rate

Characteristics (Representative values)




SMC





Miniature Regulator **ARJ210** Series

Construction/Dimensions

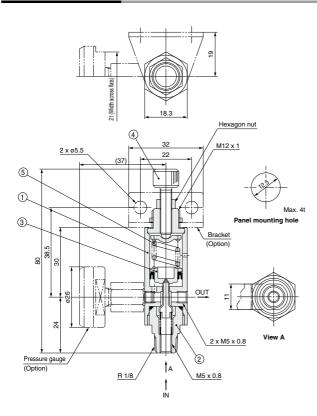

No.	Description	Material	Note	
1	Body	Aluminum alloy	Black anodized	
2	Valve guide	Brass	Electroless nickel plated	
3	Piston	POM		
4	Adjusting screw	Iron	Nickel plated	
5	Adjusting spring	Steel wire	Zinc chromated	

SMC

Precautions Be sure to read this before handling the products. Refer to back page 50 for Safety Instructions and ARJ pages 387 to 391 for Precautions on every series. AR425 to 935 Selection ARX **∆**Warning 1. This product cannot be used as a check AMR regulator by installing it between solenoid valve and actuator. Doing so could ARM lead to equipment damage. 2. When piping, tighten the regulator with the ARP recommended proper tightening torque shown in the table below while holding the wrench flats (width 11) of the valve guide IR -A for IN port and holding the hexagonal section of the body for the OUT port. Excessive IR torque or holding it other than at the specified area could lead to equipment damage. IRV 3. While piping to products or operating the knob, ensure that an excessbending moment should not be applied to a prod-VEX uct, because it may result in damage. Recommended proper torque SRH Connection Recommended Note thread proper torque (N-m SRP The recommended torque when using 1.0 to 1.5 M5 a tightening tool to tighten an additional SRF 1/6 to 1/4 turn after tightening by hand **B1/8** 7 to 9 ITV Mounting/Adjustment IC **∆**Warning 1. Set up the regulator while verifying the pres-ITVH sure that is indicated on the inlet and the outlet pressure gauges. Turning the knob ex-ITVX cessively could damage the internal parts. PVQ 1. Release the lock to adjust the pressure. After the adjustment, engage the lock. VY1 Failure to observe this procedure could damage the knob or cause the outlet VBA pressure to fluctuate. VBAT <Lock operating method> Loosen the lock nut to unlock it, and tight-AP100 en it to lock it. 2. This product cannot be used as a check regulator by installing it between solenoid valve and actuator. (Except X209)

Port with a pressure gauge or a plug can be used as an OUT port.

Maintenance

∆Warning

 Make sure to perform a periodic inspection of the pressure gauge when the miniature regulator is installed between a solenoid valve and an actuator. Sudden pressure changes could happen and the durability of the product could be reduced. Using an electronic type pressure gauge is recommended, depending on the situation.